


40W LEFT TRIANGULAR SOLAR MODULE

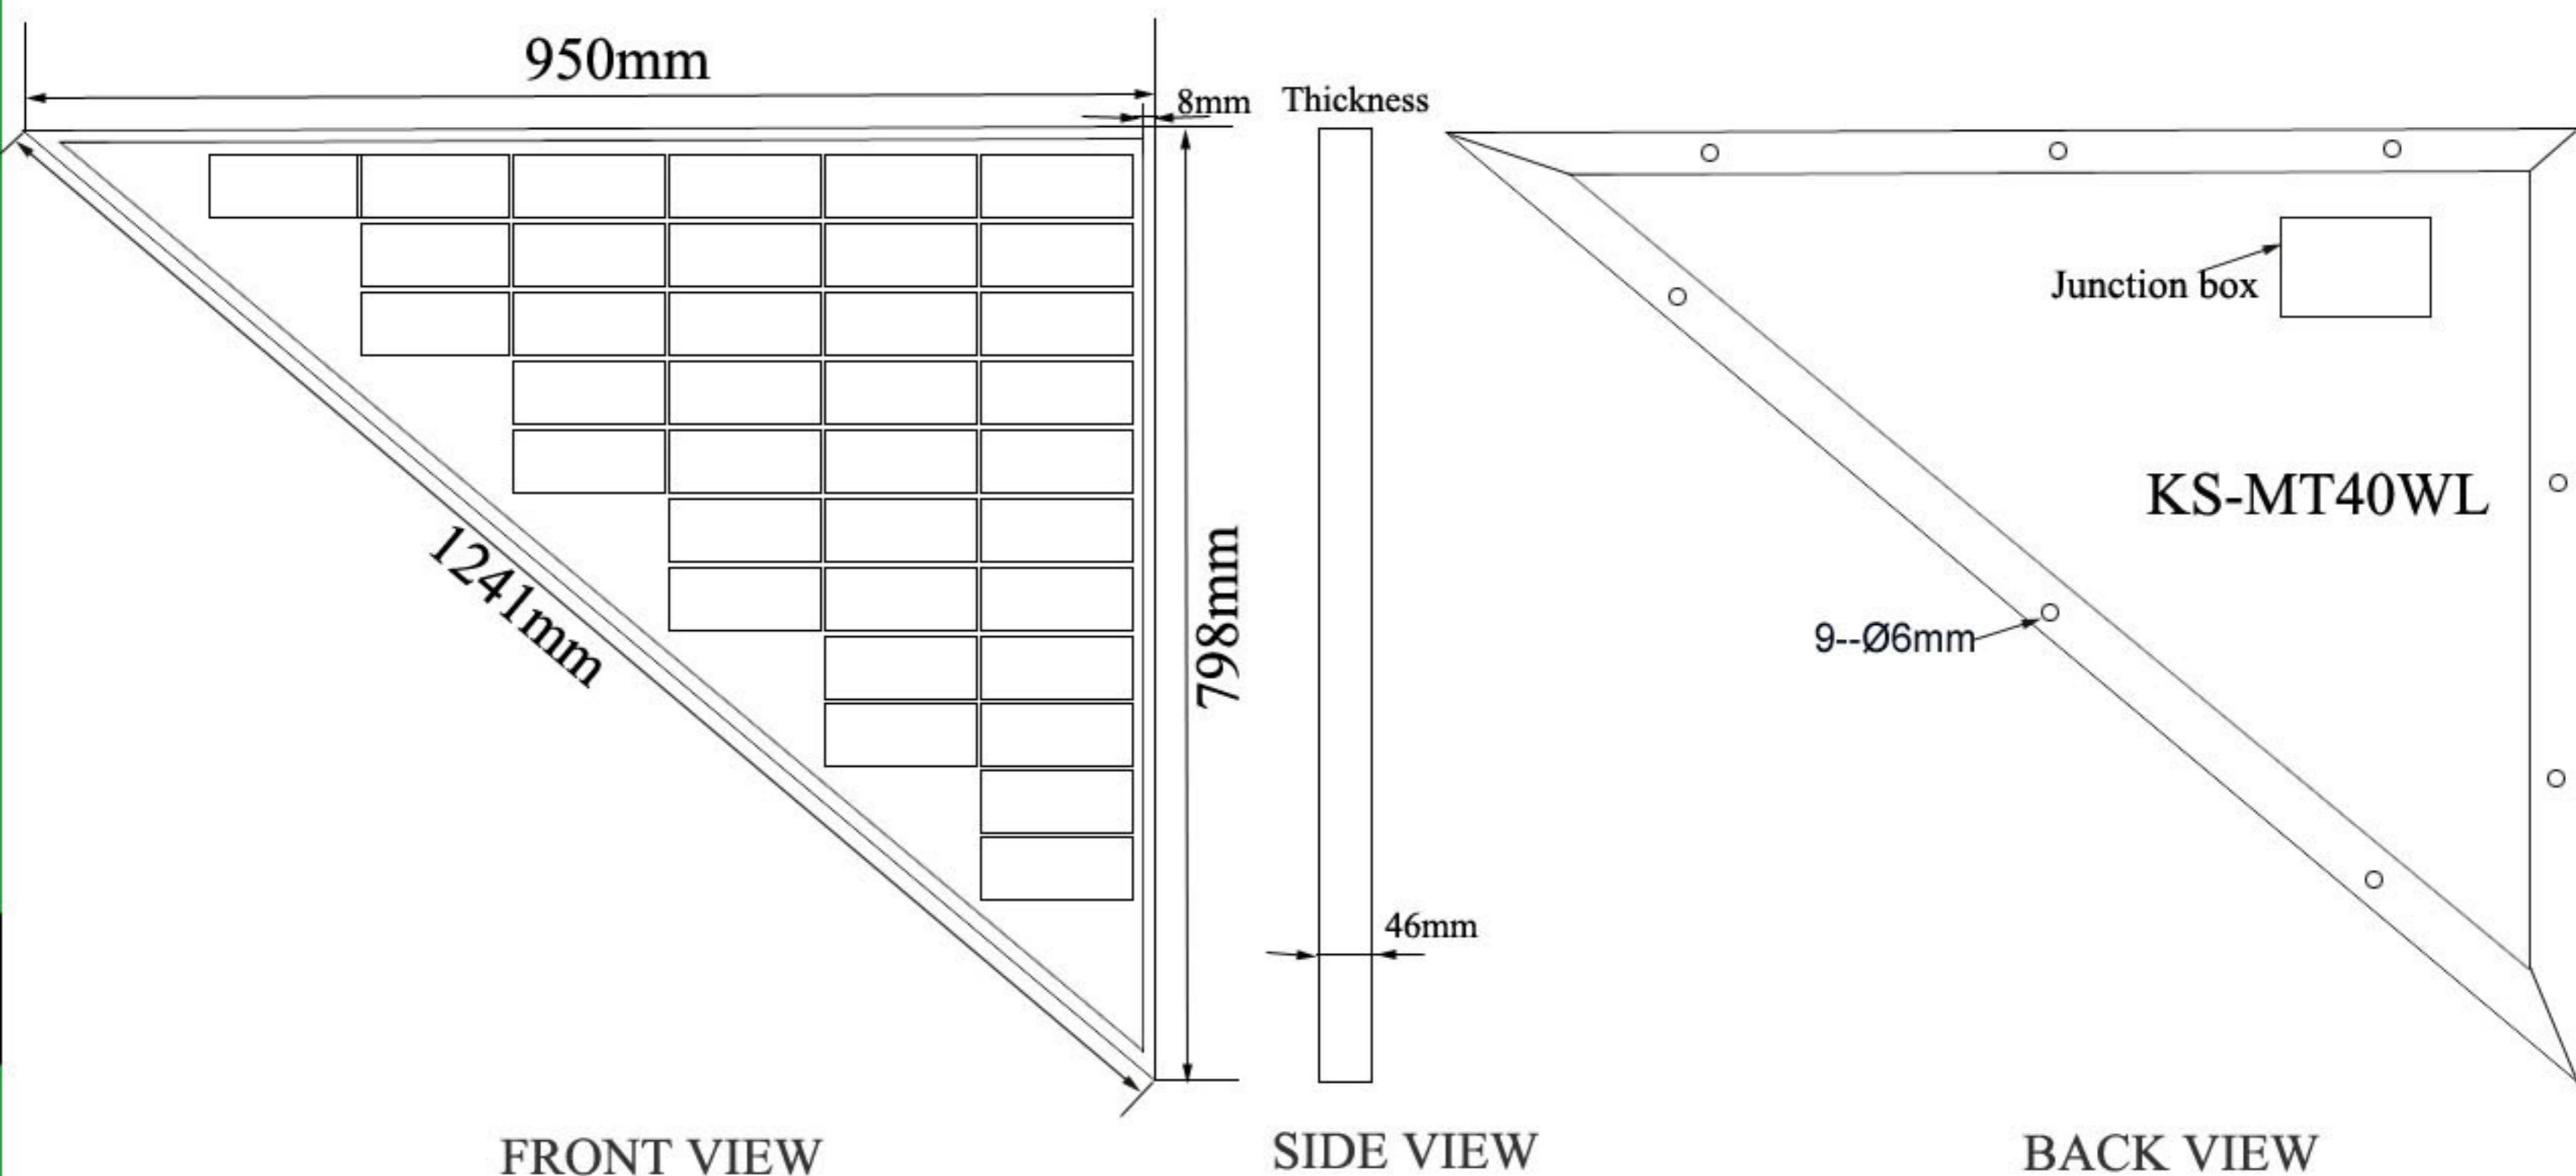


ELECTRICAL CHARACTERISTICS	
Power	40W
Operating Voltage	18V
Operating Current	2.22A
Type of solar cell	Monocrystalline Silicon
Power Tolerance	±5%
STC: Irradiance 1000W/m ² , Module temperature: 25°C, AM=1.5	

TEMPERATURE COEFFICIENTS	
Nominal Operating Cell Temperature (NOCT): 45°C±2°C	
Temp. Coefficient of I _{sc}	(0.045±0.01)%/°C
Temp. Coefficient of V _{oc}	-(0.34±0.01)/°C
Temp. Coefficient of Power	-(0.47±0.05)%/°C

TESTED OPERATING CONDITIONS	
Max load	50psf 245kg/m ² (2400)pascals
Hailstone impact	25mm(1inch) at 23m/s(52mph)
Temperature	-40° C to + 85° C

MECHANICAL SPECIFICATIONS	
Dimensions	950*798*46mm, Left Slope:1241mm
Encapsulation	Glass/EVA/Cells/EVA/TPT
Front Glass	Tempered Glass, thickness: 3.2mm
Frame	Anodized aluminum alloy (Black)
Output lead wire	Without output wire
Efficiency : ≥16% Dimensions Tolerance: ±0.3mm	

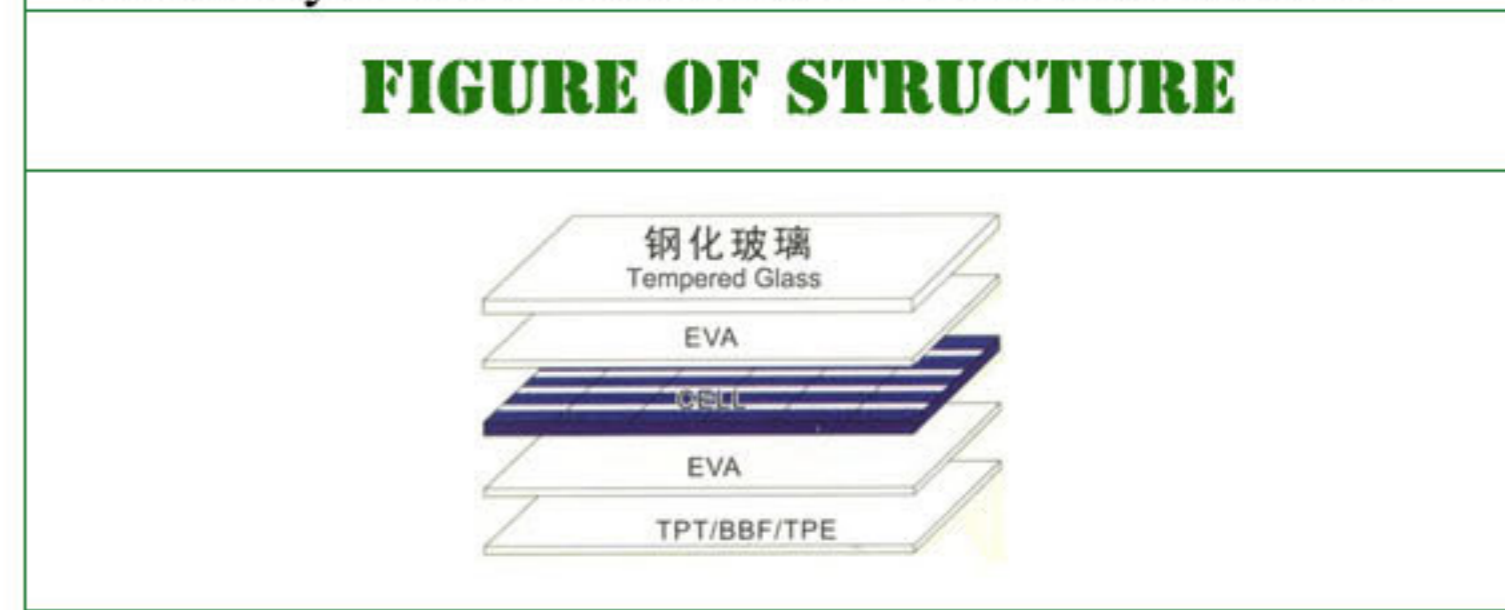

WARRANTIES	
Power output more than 90% for 10years	
Power output more than 80% for 25years	
Working life 25years	

The technical files provided by CHINA SOLAR LTD

Office Address:
 NO.601,ZhongKang Pioneer Park,ZhongKang Road,
 Futian District, ShenZhen City,Guangdong Province,China
 Factory Address:
 Longxi Hi-tech Industrial Park, Longcheng Road, Longgang
 Town, ShenZhen City,Guangdong Province,China



Tel: +86.755.8351 5659
 Fax: +86.755.8271 6024
 Website: <http://www.solars-china.com>
 Email: market@solars-china.com
 MSN: market@solars-china.com
 Skype: KAXIDY